



### Features and Benefits

- Simultaneously measure size-segregated mass fraction concentrations corresponding to PM<sub>1</sub>, PM<sub>2.5</sub>, Respirable, PM<sub>10</sub>, and Total PM size fractions
- Easy to program, easy to operate
- New graphical user interface with color touch-screen
- Perform in-line gravimetric analysis for custom reference calibrations
- Automatic zeroing (with optional zero module) minimizes the effect of zero drift

### DUSTTRAK™ DRX Aerosol Monitor Models 8533 and 8534

#### *Real-Time Dust Monitoring Takes a Giant Leap Forward*

Only the new DUSTTRAK™ DRX Aerosol Monitor can simultaneously measure both mass and size fraction—no other monitor can do both. DUSTTRAK DRX monitors are battery-operated, data-logging, light-scattering laser photometers that give you real-time aerosol mass readings. They use a sheath air system that isolates the aerosol in the optics chamber to keep the optics clean for improved reliability and low maintenance. Suitable for clean office settings as well as harsh industrial workplaces, construction and environmental sites and other outdoor applications. DUSTTRAK DRX monitors measure aerosol contaminants such as dust, smoke, fumes and mists.

### Applications

- Industrial/occupational hygiene surveys
- Indoor air quality investigations
- Outdoor environmental monitoring
- Baseline trending and screening
- Point source monitoring
- Engineering control evaluations
- Engineering studies
- Remote and process monitoring
- Emissions monitoring
- Aerosol research studies





## DUSTTRAK DRX Aerosol Monitors Are Light Years Ahead of Any Other

These new laser photometers simultaneously measure five size-segregated mass fraction concentrations at once—something no other monitor can do. Both the desktop and handheld monitors are continuous real-time 90° light-scattering laser photometers that simultaneously measure size-segregated mass fraction concentrations corresponding to PM<sub>1</sub>, PM<sub>2.5</sub>, Respirable, PM<sub>10</sub>, and Total PM fractions. They combine both particle cloud (total area of scattered light) and single particle detection to achieve mass fraction measurements.

This size-segregated mass fraction measurement technique is superior to either a basic photometer or optical particle counter (OPC). It delivers the mass concentration of a photometer and the size resolution of an OPC.

- Photometers can be used at high mass concentration, but they do not give any size information (unless used with size selective inlet conditioners) and significantly underestimate large particle mass concentrations.
- OPC's provide size and count information; however, they do not provide any mass concentration information and cannot be used in high mass concentration environments.

## Easy to Program and Operate

The new graphical user interface with color touch-screen puts everything at your fingertips. The easy-to-read display shows real-time mass concentration and graphical data as well as other statistical information along with instrument pump, laser and flow status, and much more. Perform quick walk-through surveys or program the instrument's advanced logging modes for long-term sampling investigations. Program start times, total sampling times, logging intervals, alarm setpoints and many other parameters. You can even set up the instrument for continuous unattended operation.



## Desktop Models: Ideal for Long-Term Surveys and Remote Monitoring Applications

Manual and programmable data logging functions also make DUSTTRAK DRX desktop monitors ideal for unattended applications. They come with USB (device and host), Ethernet, and analog and alarm outputs allowing remote access to data. User adjustable alarm setpoints for instantaneous or 15-minute short-term excursion limit (STEL) are available on desktop models. The alarm output with user-defined setpoint alerts you when upset or changing conditions occur.

All DUSTTRAK DRX desktop monitors have four unique features:

- Gravimetric sampling capability using a 37-mm filter cassette which can be inserted in-line with the aerosol stream allowing you to perform an integral gravimetric analysis for custom reference calibrations.
- They can be zeroed automatically using the external zeroing module. This optional accessory is used when sampling over extended periods of time. By zeroing the monitor during sampling, the effect of zero drift is minimized.
- STEL alarm feature for tracking 15-minute average mass concentrations when alarm setpoint has been reached for applications like monitoring fugitive emissions at hazardous waste sites.
- Standard and advanced calibration capabilities. The DUSTTRAK DRX Aerosol Monitor has two calibration factors: a photometric calibration factor (PCF) and a size calibration factor (SCF). The PCF accounts for the photometric response difference between A1 Test Dust and the aerosol under measurement, while the SCF accounts for the aerodynamic size difference.
  - The primary goal of the standard calibration is to obtain the SCF for the aerosol of interest. The standard calibration process is very easy and does not require comparison to gravimetric samples. Measure with and without a PM<sub>2.5</sub> impactor, and the instrument takes the ratio of these two size distributions and compares this reading to the PM<sub>2.5</sub> impactor transmission efficiency curve to calculate the SCF. However, the absolute mass concentration may not be as accurate as the advanced calibration.
  - The advanced calibration method yields high size segregated mass concentration accuracy. It involves two separate gravimetric measurements to obtain PCF and SCF in sequence. The advanced calibration will accurately measure size segregated mass concentrations.

## Handheld Models: Perfect for Walk-Through Surveys and Single-Point Data Collection Applications

DUSTTRAK DRX handheld models are lightweight and portable. They're perfect for industrial hygiene surveys, point source location monitoring, indoor air quality investigations, engineering control evaluations / validation, and for baseline trending and screening. Like desktop models, they have manual and programmable data logging functions. In addition, they have single-point data logging capability. Single-point data collection is used for walk-through industrial hygiene surveys and indoor air quality investigations.


## New Software Makes Monitoring Easier than Ever

TRAKPRO™ Data Analysis Software allows you to set up and program directly from a PC. A new feature is the ability for remote programming and data acquisition from your PC via wireless (922 MHz or 2.4 GHz) communications or over an Ethernet network. As always, you can print graphs, raw data tables and statistical and comprehensive reports for recordkeeping purposes.

## DUSTTRAK DRX Aerosol Monitor Features

### All Models

- Li-Ion rechargeable batteries
- Internal and external battery charging capabilities
- Outlet port for isokinetic sampling applications
- User serviceable sheath flow and pump filters
- Logged test pause and restart feature
- Logged test programming
  - Color touch screen—either manual mode or program mode
  - TRAKPRO™ Data Analysis Software via a PC
- User adjustable standard or advanced custom calibration settings
- Instantaneous alarm settings with visual and audible warnings
- Real-time graph display
- View statistical information during and after sampling
- On-screen instrument status indicators: FLOW, LASER and FILTER
- Filter service indicator for user preventative maintenance

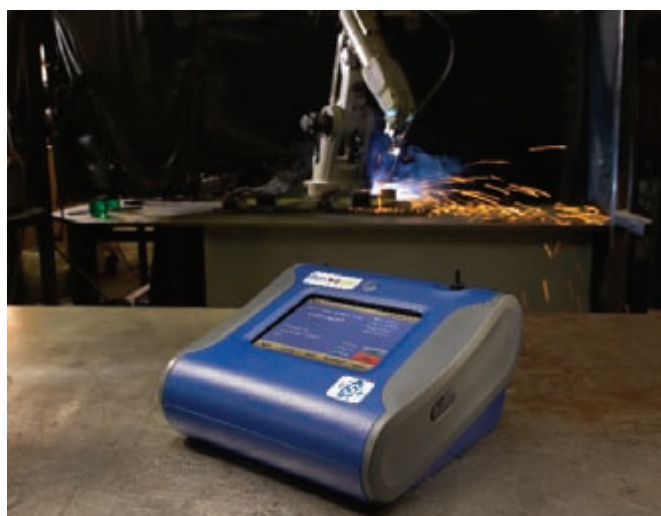

### All Desktop Models

- Hot swappable batteries
- Gravimetric reference sample capability
- Long life 10,000-hour internal pump
- TRAKPRO Data Analysis Software
- Auto zeroing module (optional accessory)
- STEL alarm setpoint



### All Handheld Models


- Long life 2,500-hour internal pump
- Single-point data collection for walk through surveys
- TRAKPRO Data Analysis Software

## Battery Performance

Model 8533 (typical) 6600 mAh Li-Ion Battery Pack (P/N 801680)	1 Battery	2 Batteries
Battery Runtime (hours)	up to 6	up to 12
Charge Time * (hours) in DUSTTRAK	4	8
Charge Time* (hours) in external battery charger (P/N 801685)	4	8

Model 8534 (typical) 3600 mAh Li-Ion Battery Packs (P/N 801681)	Battery
Battery Runtime (hours)	up to 6
Charge Time * (hours) in DUSTTRAK	4
Charge Time* (hours) in external battery charger (P/N 801686)	4

\*of a fully depleted battery



## Specifications

### Models 8533 and 8534 DUSTTRAK™ DRX Aerosol Monitor

#### Sensor Type

90° light scattering

#### Particle Size Range

0.1 to  $\approx 15 \mu\text{m}$

#### Aerosol Concentration Range

8533 Desktop 0.001 to 150  $\text{mg}/\text{m}^3$   
8534 Handheld 0.001 to 150  $\text{mg}/\text{m}^3$

#### Display

Size Segregated Mass Fractions for  $\text{PM}_{10}$ ,  $\text{PM}_{2.5}$ , Respirable,  $\text{PM}_{10}$  and Total. All displayed

#### Resolution

$\pm 0.1\%$  of reading or 0.001  $\text{mg}/\text{m}^3$ , whichever is greater

#### Zero Stability

$\pm 0.002 \text{ mg}/\text{m}^3$  per 24 hours at 10 sec time constant

#### Flow Rate

3.0 L/min

#### Flow Accuracy

$\pm 5\%$  of factory set point, internal flow controlled

#### Temperature Coefficient

+0.001  $\text{mg}/\text{m}^3$  per  $^{\circ}\text{C}$

#### Operational Temp

32 to 120 $^{\circ}\text{F}$  (0 to 50 $^{\circ}\text{C}$ )

#### Storage Temp

-4 to 140 $^{\circ}\text{F}$  (-20 to 60 $^{\circ}\text{C}$ )

#### Operational Humidity

0 to 95% RH, non-condensing

#### Time Constant

User adjustable, 1 to 60 seconds

#### Data Logging

5 MB of on-board memory (>60,000 data points)  
45 days at 1 minute logging interval

#### Log Interval

User adjustable, 1 second to 1 hour

#### Physical Size (HWD)

Handheld 4.9 x 4.8 x 12.5 in.  
(12.5 x 12.1 x 31.6 cm)  
Desktop 5.3 x 8.5 x 8.8 in.  
(13.5 x 21.6 x 22.4 cm)

#### Weight

Handheld  
Desktop

2.9 lb (1.3 kg), 3.3 lb (1.5 kg) with battery  
3.5 lb (1.6 kg), 4.5 lb (2.0 kg)–1 battery,  
5.5 lb (2.5 kg)–2 batteries

#### Communications

8533

USB (Host and Device) and Ethernet. Stored data accessible using flash memory drive

8534

USB (Host and Device). Stored data accessible using flash memory drive

#### Power-AC

Switching AC power adapter with universal line cord included, 115–240 VAC

#### Analog Out

8533

User selectable output, 0 to 5 V or  
2 to 20 mA  
User selectable scaling range

#### Alarm Out

8533

Relay or audible buzzer  
Relay

Non-latching MOSFET switch  
User selectable set point  
–5% deadband

Connector 4-pin, Mini-DIN connectors  
Audible buzzer

8534

#### Screen

8533

5.7 in. VGA color touchscreen

8534

3.5 in. VGA color touchscreen

#### Gravimetric Sampling

8533

Removable 37 mm cartridge (user supplied)

#### CE Rating

Immunity

EN61236-1:2006

Emissions

EN61236-1:2006

*Specifications are subject to change without notice. TSI, the TSI logo, DUSTTRAK, and TRAKPRO are trademarks of TSI Incorporated. Microsoft and Windows are trademarks of Microsoft Corporation.*

**TSI Incorporated** - 500 Cardigan Road, Shoreview, MN 55126-3996 USA

USA	Tel: +1 800 874 2811	E-mail: info@tsi.com	Website: www.tsi.com
UK	Tel: +44 149 4 459200	E-mail: tsiuk@tsi.com	Website: www.tsiinc.co.uk
France	Tel: +33 491 95 21 90	E-mail: tsifrance@tsi.com	Website: www.tsiinc.fr
Germany	Tel: +49 241 523030	E-mail: tsigmbh@tsi.com	Website: www.tsiinc.de
India	Tel: +91 80 41132470	E-mail: tsi-india@tsi.com	
China	Tel: +86 10 8260 1595	E-mail: tsibeijing@tsi.com	



TRUST. SCIENCE. INNOVATION.

Contact your local TSI Distributor or visit our website [www.tsi.com](http://www.tsi.com) for more detailed specifications.